

FLOW SWITCH

Flow switch DW-R 820628-XX

Technical data

Power supply: 230 V; 1.5 A; 80 W; 90 VA max.

Protection type: IP 65
(others on request)

Temperature
of medium: 100 °C max.
(others on request)

Ambient
temperature: 70 °C max.

Switch: Can be used normally closed or
normally open contact

SPDT switch is available on request

Switch


hysteresis: Approx. 5 %



Type	NW DN	R"	Installation range		Q Max L/min	PN Bar	T Max Gr C
			ON	OFF			
DW-R-15	15	1/2"	4,5 - 6,5	3,0 - 5,5	45	25	110
DW-R-20	20	3/4"	8,5 - 12,0	6,5 - 11,0	80	25	110
DW-R-25	25	1"	13,0 - 20,0	11,0 - 19,0	130	25	110
DW-R-32	32	1 1/4"	17,0 - 26,0	15,0 - 25,0	160	25	110

Material:

- Brass / stainless steel

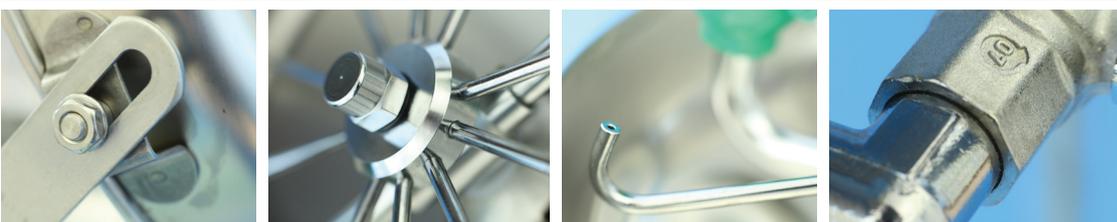

 **GIA Premix**

GIA Premix AB
www.giapremix.se |
info@giapremix.se Telefon
0240-59 40 00