

# Safety mixer GIA-20

The safety mixer cartridge contains two thermoscopic sensing bodies to ensure a stable outlet temperature, a unique enclosed unit made of approved high-tech materials, resulting in a longer service-free time. The unit uses an advanced updated thermoscopic sensing body that adjusts the water to the right temperature for different needs.

## FOR AN EMERGENCY SHOWER THAT IS CONNECTED THE SAFETY MIXER APPLIES AS FOLLOWS:


Activate the shower, the initial flushing takes place with cold water, then, with some delay, (depending on the length of the hot water pipe and if there is a water circulation), the water adopts the preset temperature. As a result, both hands are free to help keep your eyes fully open.

- Compensates for possible pressure & temperature fluctuations in the system
- In the event of a cold water outage, the protective mixer cuts the hot water supply
- Continued cold water flow in case of any hot water loss
- No "unnecessary" handles to activate the protective mixer
- Comes complete with built-in check valves

Dimensions: Width: 200 mm • Height: 145 mm • Deep: 188 mm

**RSK-nr: 755 9738**

Capacity:	Ca. 120 liter/min
Connection:	DN20
Material:	Brass
Surface:	Chrome
Wall bracket:	Incl.

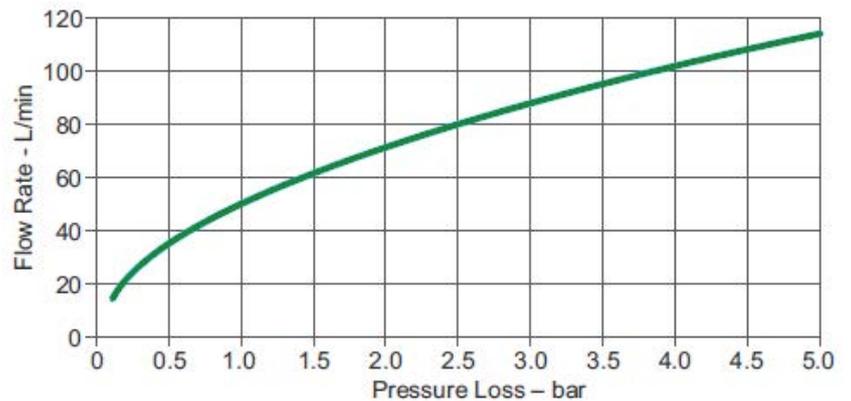

 **GIA Premix**

GIA Premix AB  
www.giapremix.se | info@giapremix.se  
Telefon 0240-59 40 00

