



Min flow: 20 + 76 l/min

Position	Description
1	Avlopp 75mm hona Drain 75mm female
2	Anslutning tempererat vatten BSP 1" utv. Connection tepid water BSP 1" male
3	Elanslutning Electrical connection 230VAC, 10A, 1ph

Note!  
All measurements are general,  
can differ by about 10mm due to  
different production runs.

For EX-version:  
Design and placement of  
electrical junction box may  
vary from the drawing.

VIEW8 ( 1 : 35 )

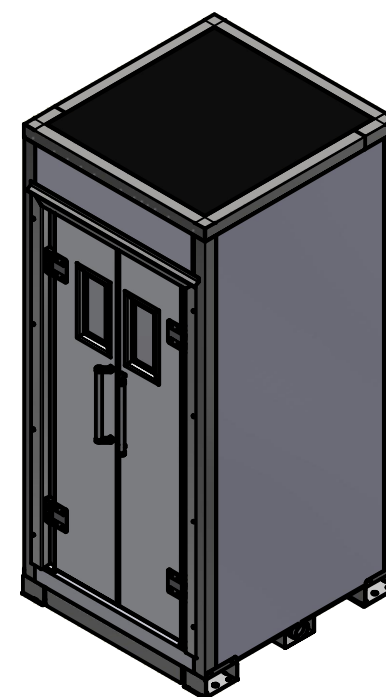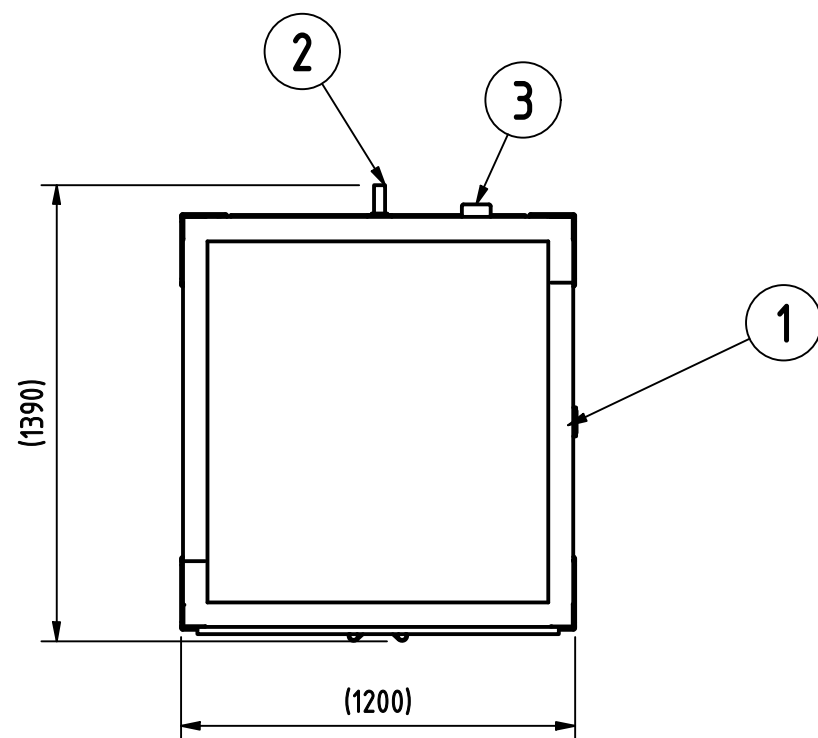

820876K  
820876-EX